




www.frigoblock.com.tr

DONMUŞ SERİ FROST SERIES

(Evaporasyon Sıcaklığı **-25°C**, Kondenzasyon Sıcaklığı **+40°C**) HERMETİK R404A

(Evaporation Temperature **-25°C**, Condensation Temperature **+40°C**) HERMETIC R404A

Tip Type	Q Watt	P HP	TP kW	C.O.P	Komp. Tipi Comp. Type	V m³	Besleme Power Supply	Evap. Modeli Evap. Type
FSP 0145-HZ	1.439	1,47	1,10	1,30	CAJ 2464 Z	10/14	220 V/50 Hz	PSEQ / PSE 30.12 6
FSP 0170-HZ	2.111	2,12	1,58	1,33	TFH 2480 Z	15/24	380 V/50 Hz	PSEQ / PSE 30.22 6
FSP 0270-HZ	2.887	2,65	1,98	1,46	TFH 2511 Z	25/40	380 V/50 Hz	PSEQ / PSE 30.22 6
FSP 0360-HZ	3.971	3,72	2,78	1,48	TAG 2516 Z	41/62	380 V/50 Hz	PSEQ / PSE 30.32 6
FSP 0475-HZ	5.136	4,62	3,44	1,49	TAG 2522 Z	63/90	380 V/50 Hz	PSEQ / PSE 30.42 6
FSP 0575-HZ	5.665	5,15	3,84	1,47	TAG 2525 Z	91/110	380 V/50 Hz	PSE 40.21.8

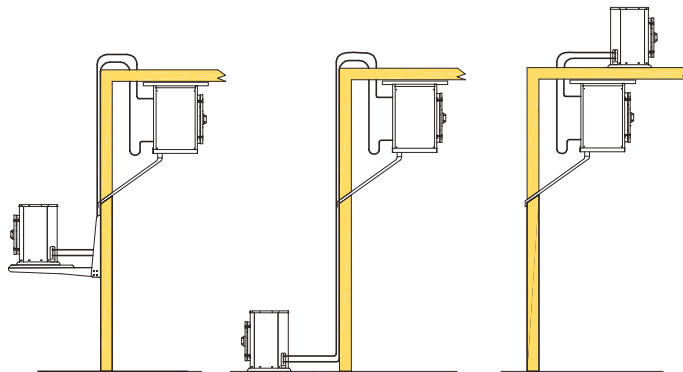

CSP/FSP Tip Bağlantı Şekilleri
CSP/FSP Units Mounting Types